


YXR1052

OVAL-SHAPE REPLACEMENT LINKS

ITEM NO.	CHAIN SIZE (IN.)	WLL (LBS.)	WEIGHT (KG)	DIMENSIONS (IN.)						
				A	B	C	D	E	F	G
YXR1052-01	3/16	800	2.5	0.25	0.69	0.34	0.34	1.19	0.78	0.28
YXR1052-02	1/4	1325	6.25	0.28	0.88	0.44	0.44	1.50	1.00	0.31
YXR1052-03	5/16	1950	12.5	0.34	0.94	0.47	0.47	1.69	1.16	0.38
YXR1052-04	3/8	2750	20.0	0.41	1.13	0.56	0.56	2.06	1.38	0.47
YXR1052-05	7/16	3625	27.5	0.47	1.28	0.59	0.59	2.34	1.53	0.53
YXR1052-06	1/2	4750	37.5	0.53	1.47	0.66	0.66	2.66	1.72	0.59
YXR1052-07	5/8	7250	72.5	0.66	1.81	0.78	0.81	3.31	2.09	0.75
YXR1052-08	3/4	10250	122.5	0.78	2.13	0.94	1.06	3.88	2.50	0.88
YXR1052-09	7/8	12000	175.0	0.91	2.50	1.13	1.13	4.50	2.94	1.00
YXR1052-10	1	15500	250.0	1.03	2.75	1.25	1.25	5.00	3.31	1.13

◆ Ultimate Load at 4 Times the Working Load Limit.

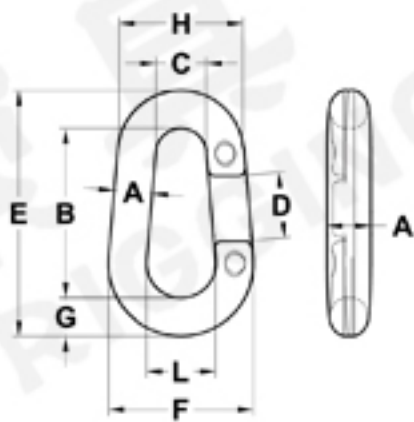

YXR1051

PEAR SHAPE REPLACEMENT LINKS

ITEM NO.	CHAIN SIZE (IN.)	WLL (LBS.)	WEIGHT (KG)	DIMENSIONS (IN.)								
				A	B	C	D	E	F	G	H	L
YXR1051-01	3/8	1850	25	0.41	2.00	0.56	0.81	2.94	1.63	0.47	1.38	0.81
YXR1051-02	1/2	3300	50	0.50	2.50	0.69	1.00	3.63	2.00	0.56	1.69	1.00
YXR1051-03	5/8	5000	75	0.63	2.75	0.81	1.06	4.00	2.38	0.63	2.06	1.13
YXR1051-04	3/4	7100	125	0.75	3.13	1.00	1.13	4.75	2.75	0.81	2.50	1.25
YXR1051-05	7/8	9600	200	0.88	3.69	1.25	1.38	5.56	3.25	0.94	3.00	1.50

◆ Ultimate Load at 4 Times the Working Load Limit.