


US TYPE FORGED WELDLESS ROUND RING

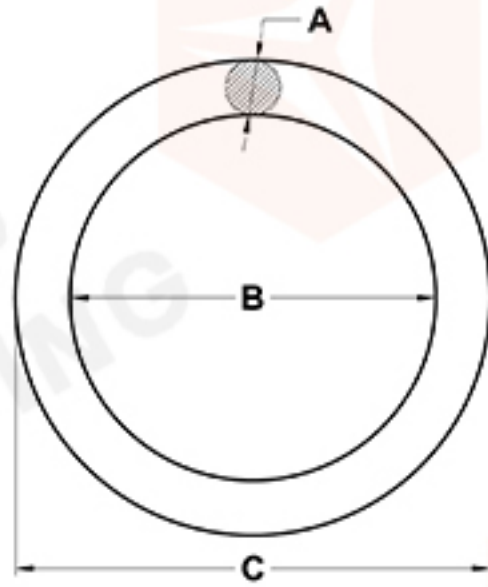

YXR1032

ITEM NO.	SIZE (IN.)	WLL (LBS.)	WEIGHT (LBS.)	DIMENSIONS (IN.)		
				A	B	C
YXR1032-01	3/8 × 2	2200	0.23	3/8	2	2 3/4
YXR1032-02	3/8 × 2 1/4	2200	0.26	3/8	2 1/4	3
YXR1032-03	3/8 × 3 1/2	2200	0.37	3/8	3 1/2	4 1/4
YXR1032-04	1/2 × 2	2200	0.44	1/2	2	3
YXR1032-05	1/2 × 3	2200	0.62	1/2	3	4
YXR1032-06	1/2 × 3 1/2	2200	0.71	1/2	3 1/2	4 1/2
YXR1032-07	5/8 × 2 1/2	3300	0.86	5/8	2 1/2	3 3/4
YXR1032-08	5/8 × 3	3300	1.00	5/8	3	4 1/4
YXR1032-09	5/8 × 3 5/16	3300	1.08	5/8	3 5/16	4 9/16
YXR1032-10	5/8 × 4	3300	1.28	5/8	4	5 1/4
YXR1032-11	3/4 × 3	3700	1.63	3/4	3	4 1/2
YXR1032-12	3/4 × 3 1/2	3700	1.68	3/4	3 1/2	5
YXR1032-13	3/4 × 4	3700	1.89	3/4	4	5 1/2
YXR1032-14	7/8 × 3 1/2	7200	2.34	7/8	3 1/2	5 1/4
YXR1032-15	7/8 × 4	7200	2.70	7/8	4	5 3/4
YXR1032-16	7/8 × 5 1/2	7200	3.47	7/8	5 1/2	7 1/4
YXR1032-17	1 × 4	10400	3.69	1	4	6
YXR1032-18	1 × 5 1/2	10400	4.54	1	5 1/2	7 1/2
YXR1032-19	1 × 6	10400	4.85	1	6	8
YXR1032-20	1 1/8 × 6	10400	6.60	1 1/8	6	8 1/4
YXR1032-21	1 1/4 × 5	17000	7.00	1 1/4	5	7 1/2
YXR1032-22	1 1/4 × 5 1/2	17000	7.41	1 1/4	5 1/2	8
YXR1032-23	1 1/4 × 6	17000	7.94	1 1/4	6	8 1/2
YXR1032-24	1 3/8 × 6	19000	10.63	1 3/8	6	8 3/4
YXR1032-25	1 1/2 × 8	22000	14.95	1 1/2	8	11
YXR1032-26	1 1/2 × 10	22000	18.08	1 1/2	10	13
YXR1032-27	2 × 12	25000	39.16	2	12	16

◆ Ultimate Load at 6 Times the Working Load Limit.